2025

Tilenow

In stock for immediate delivery

Outdoor Landscape Porcelain Tiles

DESIGNER TILE AND STONE USA
95 Newfield Avenue | Edison New Jersey 08837
Phone: 732-225-1877| Fax: 732-225-0660
www.designertilestone.com

Designer Tile and Stone USA

Designer Tile and Stone is one of the largest worldwide wholesale suppliers of the following types of tiles natural stone, quartz, ceramic, glass, porcelain, leather, mosaic and quarry tile, granite and quartz vanity tops, wood vanity bases serving auto,commercial, national retail, hospitality and high quality indoor and outdoor projects.

Our years of knowledge and experience meet and exceed the standards of the world's finest Architects, Interior Designers and Largest Developers.

With worldwide resources, Designer Tile and Stone supply a wide range of common and rare stones and tile products for a variety of projects. We also supply quartz & granite countertops cut to size for large commercial projects. Our factories have the capabilities of producing billions of square feet of stone and tile and deliver it to the marketplace.

With our ability to intricately cut to any size, thickness, and finish your project requires, you have all the choices you want and all the control you need.

Our friendly and skilled team of dedicated and professional sales, estimators, and import specialists will answer all your questions and follow your project from specification to delivery and installation.

Designer Tile and Stone supplies materials to the following
commercial, hospitality and national retail markets:
Auto, Airports, Restaurants, Hotels and Casinos Office Buildings,
Department and Chain Stores, Museums, Libraries, and Schools
Theaters and Malls, Tunnels, Multiple Family, Apartments and Condominiums

Supplier to major hotel brands as follows

Hilton HOTELS & RESORTS

IHG InterContinental Hotels Group

Marriott HOTELS · RESORTS · SUITES

CHOICE HOTELS INTERNATIONAL

KENT SERIES

Ivory

Grey

Light Grey

Porcelain tile sizes: 12”x48”, 24”x24”
Thickness: 20mm
Finish: Matte

Technical Specs:

Specs	Test Method	Reference Value	Declared Value
Static coefficient of friction	ASTM -C 1028	> 0.60 Dry and Wet	> 0.60 Dry and Wet
Dynamic coefficient of friction	DCOF Acutest	> 0.42 wet	> 0.42 wet
Resistance to freeze	ASTM -C 1026	required	Resistant
Frost Resistance	ISO -10545-12	As reported	Resistant
Chemical Resistance	ASTM -C 650	As reported	Not affected
Resistance to staining	ASTM -C 1378	As reported	Not affected
Amount of water absorbed, in percentage	ASTM- C 373	<= 0.5%	<= 0.5%
Breaking strength in N (thickness >=7.5 mm)	ASTM - C 648	>= 2500 LBF Average	>= 3000 LBF Individual
Resistance to deep abration of unglazed tiles	ASTM -C 1243	< 175 mm3	<150
Thermal Shock Resistance	ASTM - C 484	-	Meets the requirement

KENT SERIES

POCONO SERIES

Grey

Multicolor

White

Cream White

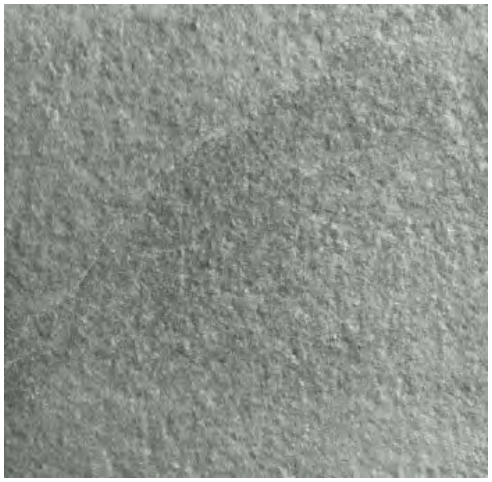
Light Grey

Dark Grey

Porcelain tile size: 24”x24”
Thickness: 20mm
Finish: Rough

Technical Specs:

Specs	Test Method	Reference Value	Declared Value
Static coefficient of friction	ASTM -C 1028	> 0.60 Dry and Wet	> 0.60 Dry and Wet
Dynamic coefficient of friction	DCOF Acutest	> 0.42 wet	> 0.42 wet
Resistance to freeze	ASTM -C 1026	required	Resistant
Frost Resistance	ISO -10545-12	As reported	Resistant
Chemical Resistance	ASTM -C 650	As reported	Not affected
Resistance to staining	ASTM -C 1378	As reported	Not affected
Amount of water absorbed, in percentage	ASTM- C 373	<= 0.5%	<= 0.5%
Breaking strength in N (thickness >=7.5 mm)	ASTM - C 648	>= 2500 LBF Average	>= 3000 LBF Individual
Resistance to deep abration of unglazed tiles	ASTM -C 1243	< 175 mm3	<150
Thermal Shock Resistance	ASTM - C 484	-	Meets the requirement

POCONO SERIES

NORWOOD SERIES

White

Tan

Grey

Porcelain tile size: 12” x 48”
Thickness: 20mm
Finish: Matte

Technical Specs:

Specs	Test Method	Reference Value	Declared Value
Static coefficient of friction	ASTM -C 1028	> 0.60 Dry and Wet	> 0.60 Dry and Wet
Dynamic coefficient of friction	DCOF Acutest	> 0.42 wet	> 0.42 wet
Resistance to freeze	ASTM -C 1026	required	Resistant
Frost Resistance	ISO -10545-12	As reported	Resistant
Chemical Resistance	ASTM -C 650	As reported	Not affected
Resistance to staining	ASTM -C 1378	As reported	Not affected
Amount of water absorbed, in percentage	ASTM- C 373	<= 0.5%	<= 0.5%
Breaking strength in N (thickness >=7.5 mm)	ASTM - C 648	>= 2500 LBF Average	>= 3000 LBF Individual
Resistance to deep abration of unglazed tiles	ASTM -C 1243	< 175 mm3	<150
Thermal Shock Resistance	ASTM - C 484	-	Meets the requirement

NORWOOD SERIES

FRISCO SERIES

White

Grey White

Grey

Porcelain tile sizes: 12” x 48”, 24" x 48", 24" x 24"
Thickness: 20mm
Finish: Matte

Technical Specs:

Specs	Test Method	Reference Value	Declared Value
Static coefficient of friction	ASTM -C 1028	> 0.60 Dry and Wet	> 0.60 Dry and Wet
Dynamic coefficient of friction	DCOF Acutest	> 0.42 wet	> 0.42 wet
Resistance to freeze	ASTM -C 1026	required	Resistant
Frost Resistance	ISO -10545-12	As reported	Resistant
Chemical Resistance	ASTM -C 650	As reported	Not affected
Resistance to staining	ASTM -C 1378	As reported	Not affected
Amount of water absorbed, in percentage	ASTM- C 373	<= 0.5%	<= 0.5%
Breaking strength in N (thickness >=7.5 mm)	ASTM - C 648	>= 2500 LBF Average	>= 3000 LBF Individual
Resistance to deep abration of unglazed tiles	ASTM -C 1243	< 175 mm3	<150
Thermal Shock Resistance	ASTM - C 484	-	Meets the requirement

FRISCO SERIES

CULVER SERIES

White

Tan

Brown

Multicolor

Porcelain tile size: 24" x 24"
Thickness: 20mm
Finish: Matte

Technical Specs:

Specs	Test Method	Reference Value	Declared Value
Static coefficient of friction	ASTM -C 1028	> 0.60 Dry and Wet	> 0.60 Dry and Wet
Dynamic coefficient of friction	DCOF Acutest	> 0.42 wet	> 0.42 wet
Resistance to freeze	ASTM -C 1026	required	Resistant
Frost Resistance	ISO -10545-12	As reported	Resistant
Chemical Resistance	ASTM -C 650	As reported	Not affected
Resistance to staining	ASTM -C 1378	As reported	Not affected
Amount of water absorbed, in percentage	ASTM- C 373	<= 0.5%	<= 0.5%
Breaking strength in N (thickness >=7.5 mm)	ASTM - C 648	>= 2500 LBF Average	>= 3000 LBF Individual
Resistance to deep abration of unglazed tiles	ASTM -C 1243	< 175 mm3	<150
Thermal Shock Resistance	ASTM - C 484	-	Meets the requirement

CULVER SERIES

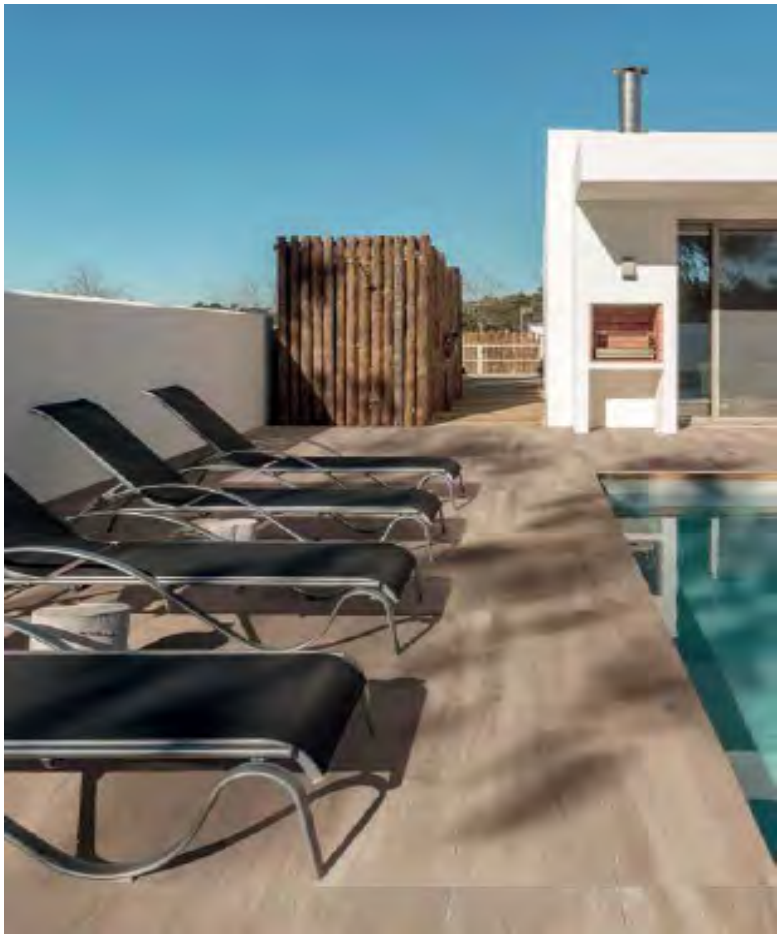

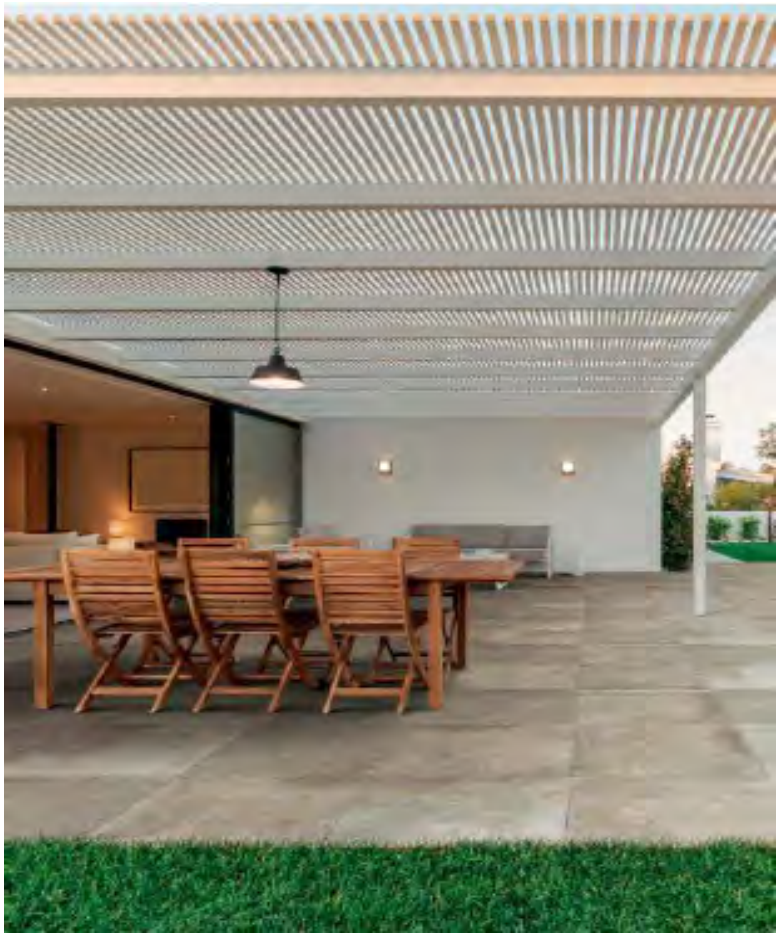

DESIGNER TILE AND STONE USA

95 Newfield Avenue
Edison New Jersey 08837
Phone: 732-225-1877
Fax: 732-225-0660
Toll Free: 877-959-TILE
www.designertilestone.com